ICE MATE

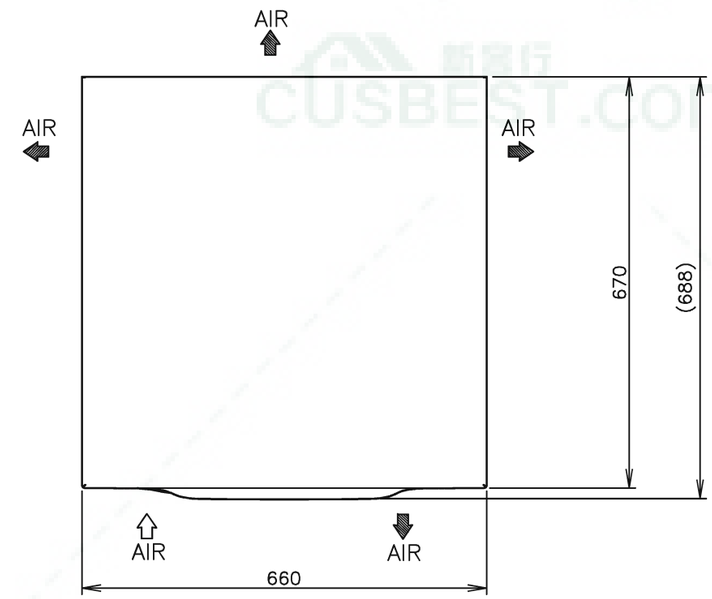

1. 依据附带的使用说明书和安装说明书中描述的供水/排水连接和电气连接的方法，正确的安装本产品；
2. 制冰量取决于产品周围的环境温度和供水温度；
3. 产品代码:M073。

	项目	艾世铭商用一体式小方冰制冰机
	型号	SRM-175A
	额定电压	单相 220-240V 50Hz
3	额定电流	3.2A (环境温度:32° C,水温:21° C)
3	启动电流	15.0A
3	功率	450W (环境温度：32° C，水温：21° C)
3	功率因素	65%
	电源容量	Min 0.88kVA(4.0A)
3	制冰能力	约80kg/24h(环境温度:10° C,水温:10° C) 约72kg/24h(环境温度:21° C,水温:15° C) 约57kg/24h(环境温度:32° C,水温:21° C)
3	耗水量	约0.17m³/24h(环境温度:10° C,水温:10° C) 约0.15m³/24h(环境温度:21° C,水温:15° C) 约0.13m³/24h(环境温度:32° C,水温:21° C)
	冰形	小方冰
3	单周期平均制冰时间	约16分钟(环境温度:21° C,水温:15° C)
3	单周期平均制冰量	约0.81kg/80pcs(环境温度:21° C,水温:15° C)
3	最大储冰量	31.4kg(自然储冰量 25.88kg)
	外型尺寸	660mm(宽) x 670mm(深) x 1050mm(高)
	外观	正面:树脂,顶面:不锈钢,侧面:不锈钢,背面:镀锌板
	发泡层	聚氨酯发泡塑料
	发泡剂	环戊烷,不含CFC,ODP:0,GWP:3
	电气连接型式	Y型连接
	供水连接规格	进口G1/2″ 内螺纹(背面)
	排水连接规格	出口 Φ24.5(背面)
	制冰系统	立式蒸发器、单面流水式
	除冰系统	热气和自然重力除冰
	压缩机型式	全封闭式
	冷凝器型式	风冷式,铜管+铝翅片
3	散热量	1099W (945kcal/h)(环境温度：32° C，水温：21° C)
	制冰板	立式，铜管+铜板 (表面电镀处理)
	截流方式	膨胀阀
3	冷媒/充注量	R404A/230g
	制冰控制系统	冰厚检知器、液位电极、计时器
	除冰控制系统	导冰板、计时器
	储冰控制系统	储冰开关
	电器保护装置	6.3A 保险丝
	压缩机保护装置	过载保护器
	制冰保护装置	通过控制器互锁
	产品重量	净重:56.5kg,毛重:63kg
3	包装型式	纸箱 785mm(宽) x 860mm(深) x 1100mm(高)
	附件	使用说明书、冰铲、底脚
	运行条件	环境温度:5-38° C;供水温度:5-32° C 供水压力:0.07-0.55MPa(0.7-5.5bar) 电压范围:198-254V

*本公司保留对产品规格和设计进行变更的权利,恕不另外通知。
*We reserve the right to make changes in specifications and design without prior notice.

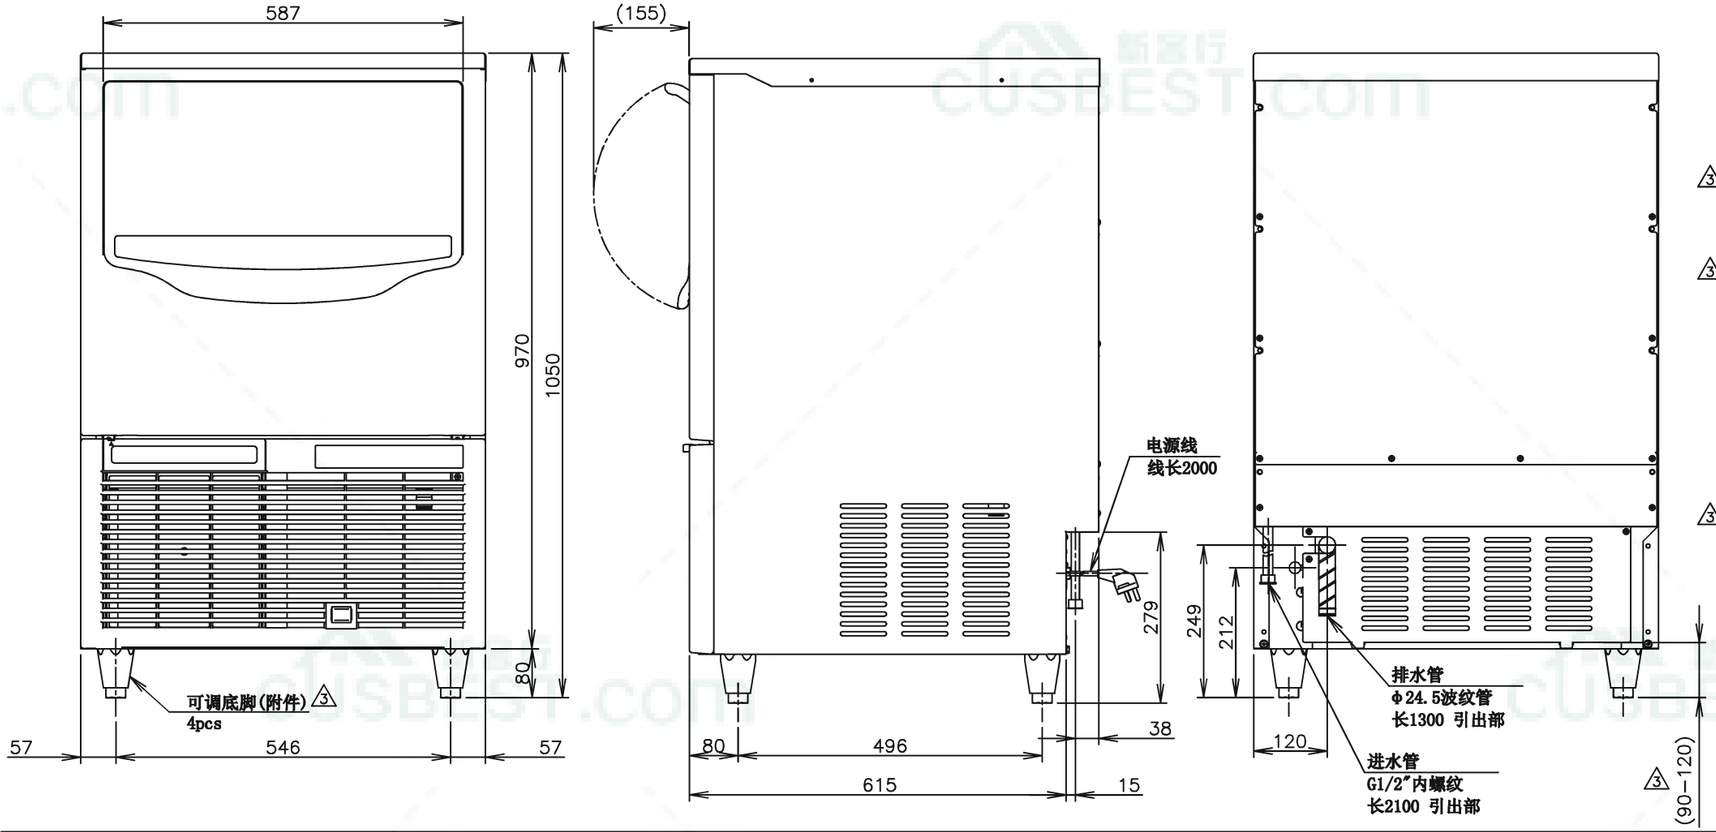

ICE MATE RHOMBIC ICE MAKER (SELF-CONTAINED TYPE) SRM-175A

APPROVED	CHECKED	DESIGNED	DRAWN	SCALE	
WAKATSUKI	SHEN	WANG	OHASHI	1/10	TRIGONOMETRY
WAKATSUKI / APPROVED	WANG / DESIGNED	3 / SYMBOL	2017.07.21 / DATE	DATE 2017.04.14	DRAWING NO. D20316 / SYMBOL 3

000520
施行